

Grundfos COMFORT XL

Easy replacements, extra performance

The COMFORT XL is a high-efficiency hot-water recirculation pump designed for multi-family homes and larger domestic systems. With a 140 mm installation length, it replaces older bronze hot-water recirculation pumps, saving time on installation and reducing spare-part complexity.

Built for drinking-water applications, the COMFORT XL delivers better performance with lower energy use (max 12 W) and meets future ErP and EU drinking-water standards, helping installers and homeowners save time, costs, and energy both today and tomorrow.



Scan the QR code to get all the details on the COMFORT XL.



Easy replacement with 140 mm

Saves time and reduce stock complexity when replacing older bronze hot-water recirculation pumps (Both 140 and 150 mm port-to-port installations).



Lower power consumption

With a power draw of just 12 W, it offers up to 75% lower energy use compared to conventional HWR pumps.



Designed for multi-family homes

Ideal for larger domestic systems with larger pipe sizes DN 25 and loop length up to 100 m.



Trusted circulator for efficiency and safe water

Fully meets future EU ErP regulations and latest EU drinking water directive.



Instant hot water, improved hygiene, lower running costs

Delivers instant access to hot water, reduces stagnation for better hygiene, and cuts energy bills with a highly efficient permanent magnet motor.

Technical data

Flow, $Q_{\max}$	1.5 m ³ /h
Head, $H_{\max}$	1.2 m
Liquid temperature	2 °C - 95 °C
Power	12 W
Sound pressure level (LP)	< 25 dB(A)
Drinking water approvals	UBA, ACS

GRUNDFOS

Possibility in every drop

Replacement in details

With the addition of COMFORT XL, the COMFORT range now offers maximum comfort and minimised energy consumption to everything from single-family homes to multi-storey buildings.



COMFORT XL


Better performance with lower power consumption.

263 kWh Conventional pump

96 kWh COMFORT XL

63%


Performance curves

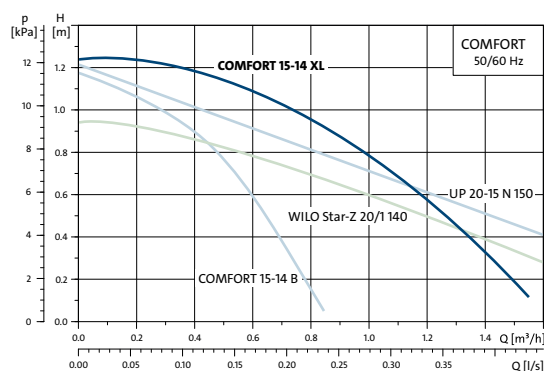

Replacement table

COMFORT 15-14 XL	
140 mm	150 mm*
G 1	G 1 1/4
WILO Star-Z 20/1	GRUNDFOS UP 20-07 N UP 20-15 N

* PN 93528349 should be purchased separately to increase length to 150 mm

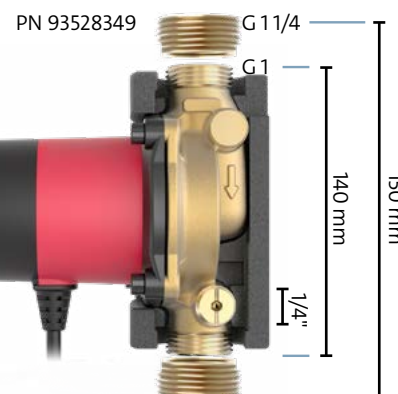

Design features

No clogging

Spherical motor design ensures maximum resistance against blockage caused by lime in water of unlimited hardness.

Easy installation

Compact design for installation in confined spaces, even with the pump head pointing downwards. The line cord enables quick electrical connection.

Dry-running protection

Ensures long pump lifetime and hassle-free commissioning.

Easy maintenance

The detachable design of the head and impeller allows cleaning of the pump in no time.

Reduced cost of installation

1/4" Air-venting (drain) screw integrated on the pump housing, enabling faster commissioning and reducing installation cost.

Lower heat losses

Insulation shells included in the box.

Types

Product	Type key	Port-to-port length	Connection
93513618	COMFORT 15-14 XL	140 mm	External thread G 1
93528349	Extender units G 1-G 1 1/4 L 5 mm	To extend to 150 mm	External thread G 1 1/4

You can find more information about the Grundfos COMFORT XL at grundfos.to/comfort-xl